




KEY FEATURES

- Digital constant current output and constant peak voltage output control function
- Four terminal contact test jig design, ensure accurate monitoring of voltage dropped on capacitors under test (patent pending)
- Paired cooper-foil wiring test cable to reduce voltage drop on the current driving loop and to ensure accurate monitoring of ac level dropped on capacitors under test (patent pending)
- 0-500 V DC bias voltage source, 0.3% basic accuracy
- 0.01~30A, 100Hz/120Hz/400Hz/1kHz AC ripple current source, ($\pm 0.5\%$ reading+0.1% of range) basic accuracy (Model 11800)
- 0.01~10A, 20kHz~100kHz AC ripple current source, 2% basic accuracy (Model 11801)
- 0.03~10A, 20kHz~1MHz AC ripple current source (Model 11810)
- Monitoring software (option) for multiple Ripple Current Testers
- Lower power consumption and lower electricity cost
- Large LCD display (320 x 240 dot-matrix)
- Alarm for indicating of normal or abnormal test termination, Tested time will be recorded if the test is terminated abnormally. An automatic discharge is always performed after test termination
- Standard RS485 interface is provided for computer monitoring
- Optional 20-fixtures Series or Parallel test jigs
- Digital timer inside
- CE marking (Model 11800/11801)


The Chroma 11800/11801/11810 Ripple Current Tester is a precision tester designed for electrolytic capacitors load life testing. Provides constant ripple current output and constant peak voltage ($V_{peak} = V_{dc} + V_{ac_peak}$) output digital control function. Let load life testing for electrolytic capacitors becomes easier and more reliable. And, The Chroma 11800/11801/11810 use excellent output amplifier design technology to reduce power consumption and internal temperature rising. For long time testing requirement, it can reduce electricity cost and perform high stability. The Chroma 11800/11801/11810 is a just right test solution for electrolytic quality evaluation.



Model 11801

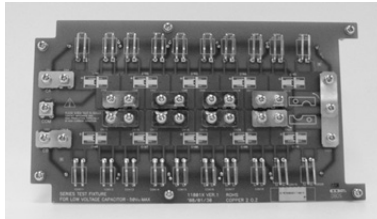

A118029 : SMD Series Test Fixture for Low Voltage

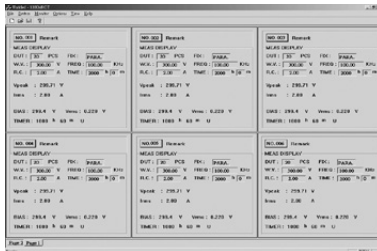

A118010 : Monitoring Software for 11801/11800

ORDERING INFORMATION

- 11800** : Ripple Current Tester 1kHz
- 11801** : Ripple Current Tester 100kHz
- 11810** : Ripple Current Tester 1MHz
- A118004** : Series Test Fixture
- A118005** : Parallel Test Fixture
- A118010** : Monitoring Software for Model 11800/11801
- A118028** : Series Test Fixture for Low Voltage
- A118029** : SMD Series Test Fixture for Low Voltage
- A118030** : PCB for SMD Capacitor

SPECIFICATIONS

Model	11800	11801	11810
Ripple Current Source			
Current Output Range	0.01~30A	0.01~10A	0.03~10A, *3
Frequency	100Hz/120Hz/400Hz/1kHz $\pm 0.1\%$	20kHz~100kHz	20kHz~1MHz
Accuracy *1	0.010A~0.199A	$\pm (3\% + 0.005 A)$	0.03~0.39A, $\pm (3\% + 0.01 A), *2$
	0.20A~1.99A	$\pm (0.5\% \text{ of reading} + 0.1\% \text{ of range})$	0.40~10.0A, $\pm (2\% + 0.05 A), *2$
	2.0A~10A		
	10.0A~30A		
Ripple Voltage Output Range	90Vrms / 10Arms, 30Vrms / 30Arms	15Vrms maximum	
DC Bias Voltage Source			
Voltage Output Range	DC 0.5 ~ 500V, $\pm (0.3\% + 0.05V)$		
Charge Current	200mA, 40W Maximum		
Signal Monitor Parameter Accuracy			
Irms (Ripple Current)	0.001A~0.199A	$\pm (2\% + 0.005 A)$	0.030A~0.399A: $\pm (3\% + 0.01A), *2, *3$
	0.20A~1.99A	$\pm (2\% + 0.05 A)$	0.400A~10.00A: $\pm (2\% + 0.05A), *2, *3$
	2.0A~10A	$\pm (2\% + 0.2 A)$	
	10.0A~30A		
Vpeak (Normally, set to capacitor rated voltage)	$V_{peak} = V_{dc} + V_{ac_peak}$		
Vdc (DC Bias Voltage)	$\pm (0.3\% + 0.05V)$		
Vrms (Ripple Voltage)	0~1.99V, $\pm (0.3\% \text{ of reading} + 0.5\% \text{ of range})$ 2.00~19.99V, $\pm (0.3\% \text{ of reading} + 0.1\% \text{ of range})$ 20.00V~200.0V, $\pm (0.3\% \text{ of reading} + 0.1\% \text{ of range})$	$\pm (1\% + 0.005V)$	$\pm (1\% + 0.01V) *2$
Control Function			
Timer	1 min~10000 hour, 30min error per year		
Interface	RS-485 (Standard)		
Display	320 x 240 dot-matrix LCD display		
Operation	Start, Stop, Continue		
Protection	OCP, OTP, Over Load		
General			
Operation Environment	Temperature : 10°C~40°C, Humidity : < 90 % RH		
Power Consumption	3000 VA max.	700 VA max.	1000VA max.
Power Requirement	198 ~ 242Vac, 47 ~ 63Hz		
Dimension (H x W x D)	221.5 x 440 x 609.8 mm / 8.72 x 17.32 x 24.01 inch	353.6 x 440 x 609.8 mm / 13.92 x 17.32 x 24.01 inch	221.5 x 440 x 609.8 mm / 8.72 x 17.32 x 24.01 inch
Weight	54 kg / 118.94 lbs	60 kg / 132.16 lbs	40 kg / 88 lbs

Note*1 : 23 \pm 5°C

Note*2 : Multiple accuracy for test frequency 20~100kHz (x 1), 101~500kHz (x 2.5), 501kHz~1MHz (x 5)

Note*3 : Frequency > 500kHz : 0.10~10.0A only Note*4 : Frequency > 500kHz : 0.100~10.00A only

All specifications are subject to change without notice.