



6509 LOOP ANTENNA All Info



Frequency Range: 1 kHz - 30 MHz. The Model 6509 is a passive loop antenna designed for shielding effectiveness and immunity.

Key Features

- Individually Calibrated
- Switchable four-band transformer
- Two Year Warranty

Description

The base of the Model 6509 loop antenna contains a type N female connector and a manually switchable four-band transformer. The transformer gives the antenna greater efficiency resulting in a better conversion of power to field strength.

Every loop antenna is individually calibrated in accordance with the IEEE-291 Section 2.3.1 methods, using NIST traceable equipment. By knowing the actual antenna factors and performance characteristics of an antenna instead of typical data, you can more accurately measure field strength in your tests.

Standard Configuration

- Mounting Bracket drilled accepts an ETS-Lindgren or other tripod mount with standard 1/4 in x 20 threads.
- Antenna/loop assembly

Options

- Individually calibrated per IEEE STD 291. Actual individual calibration factors and signed Certificate of Calibration Conformance included in Manual.
- Custom cases are available on request.

Electrical Specifications


Frequency Minimum	1 kHz
Frequency Maximum	30 MHz
Connectors	Type N (f)
Impedance (Nominal)	50 Ω
Maximum Input Power	1 kW
Pattern Type	omnidirectional
Polarization	linear

Physical Specifications


Diameter	30.4 cm (11.97 inches)
Height	47.8 cm (18.82 inches)
Length	15.25 cm (6.00 inches)
Weight	1.3 kg (2.87 lb)
Width	7.63 cm (3.00 inches)

Technical Charts

6509 Loop Antenna Electric Antenna Factor

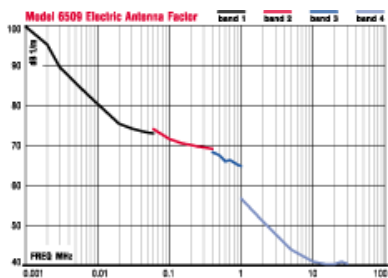

6509 Loop Antenna Magnetic Antenna Factor

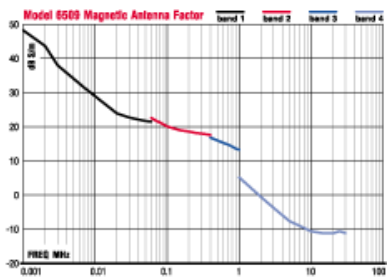

USA	FINLAND	UK	FRANCE	CHINA	JAPAN	ONLINE
Tel +1.512.531.6400	Tel +358.2.8383.300	Tel +44(0) 1438.730700	Tel +33.1.48.65.34.03	Tel +8610.8275.5086	Tel+ 81.3.3813.7100	info@ets- lindgren.com
Fax +1.512.531.6500	Fax +358.2.8651.233	Fax +44(0) 1438.730751	Fax +33.1.48.65.43.69	Fax +8610.8275.5537	Fax +81.3.3813.8068	www.ets- lindgren.com

Information presented is subject to change as product enhancements are made. Contact ETS-Lindgren Sales Department for current specification.