

## Real-time EMC and EMI diagnostic tool now available with built-in super-fast spectrum analyzer


There is no need for an external spectrum analyzer to run EHX+. World's fastest EMC and EMI diagnostic tool is now a plug-and-play test system. EHX+ is equipped with a spectrum analyzer which has a 100 MHz instantaneous bandwidth (IBW) and 75 GSPS scan rate. This analyzer has an industry leading combination of wide instantaneous bandwidth, sensitivity, tuning range, deep fast real-time caching and sophisticated capture control.

With the scan range of 150 kHz - 8 GHz, EHX+ addresses EMC and signal integrity concerns in the design of ultra-high speed (>2 GHz) PCBs. EHX+ provides unique pre- and post-EMC compliance testing that displays emissions in **real-time**. EHX+ allows engineers to visualize the root causes of potential EMC and EMI problems.

During any new PCB development process, design engineers must find, characterize, and address unintended radiators or RF leakage to pass compliance testing. EHX+ allows board designers to pre-test and resolve EMC and EMI problems early on, thus avoiding unexpected EMC compliance test results.

EHX+ delivers **repeatable** and **reliable** results that pinpoint in less than a second the cause of a design failure. As a result, the user can personally test the design without having to rely on another department, test engineer, or time-consuming off-site testing. After diagnosing even an intermittent problem, the engineer can implement a design change and retest. The results provide concrete verification of the effectiveness (or not) of the design change.

EHX+ diagnostic capabilities allow design teams to **reduce testing time** by more than two orders of magnitude. Users have also documented fifty percent reductions in design cycle times. This allows the design team to immediately analyze and compare design iterations.

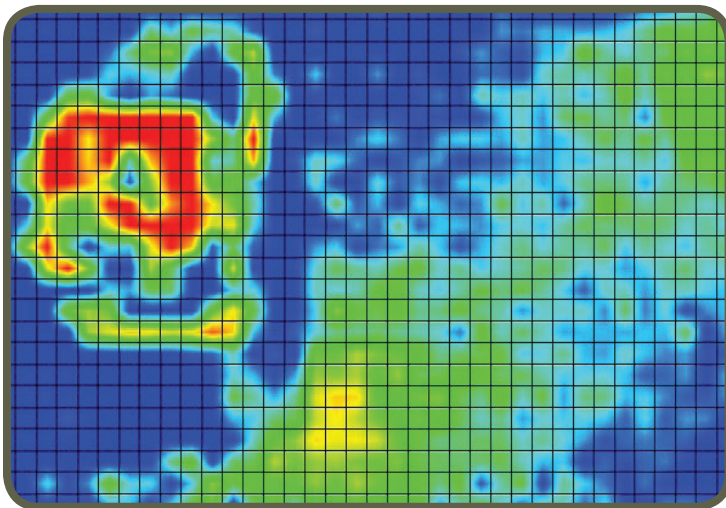

Ideal PCB projects for EHX+ are boards designed for high speed, high power, and/or high density/complexity. Any PCB that places a premium on board real-estate also qualifies as an excellent candidate.

EHX+ provides PCB design teams with an **easy-to-use, cost-effective, and proven tabletop solution**. Emission, immunity, filtering, EMI shielding, broadband noise and Common Mode testing are some of the applications that the EHX+ system addresses in mere seconds.



## EHX+ Features

<b>Capability</b>	Spectral scan, spatial scan, peak-hold, continuous scanning, spectral and spatial comparison, scripting, limit lines, report generator, notes
<b>Spatial scan time</b>	Continuous real-time or sub-second single scan for entire scan area
<b>Spectral scan time</b>	5 seconds for L 10 cm x W 10 cm (L 4" x W 4") PCB with a 100 MHz span and 120 KHz RBW. Scanning area, span and RBW are user selectable within spectrum analyzer specifications (Tested on the ERX+)
<b>Supported operating systems</b>	Windows 8®, Windows 7®, Windows Vista® and Windows XP®
<b>Supported overlays</b>	Picture in JPEG format Standard Gerber® RS274x and HPGL CAD files

## EHX+ Scanner Specifications

<b>Broadband frequency coverage</b>	150 kHz to 8 GHz Base configuration (3-year warranty) 150 kHz to 8 GHz (Part #: 3000-1905) Alternate configuration (5-year warranty) 150 kHz to 8 GHz (Part #: 3000-1906)
<b>Antenna array</b>	1,218 (42 x 29) H-field probes
<b>Spatial resolution</b>	Probe spacing of 7.5 mm with an 'effective' resolution of 3.75 mm
<b>Scan area</b>	L 31.6 cm x W 21.8 cm (L 12.44" x W 8.58")
<b>Probe to probe uniformity</b>	Calibrated before shipment. Firmware correction factors adjust for frequency dependant probe responses with +/- 3 dB accuracy
<b>Measurement plane isolation</b>	> 20 dB
<b>Maximum radiated power load</b>	10 W / 40 dBm
<b>Scanner connections</b>	PC: USB and Ethernet (via a LAN or crossover)
<b>Dimensions of the scanner</b>	L 34.5 cm x W 43.5 cm x H 11.0 cm (L 13.58" x W 17.13" x H 4.33")
<b>Weight</b>	11.79 Kg / 26 lb. (incl. cables)



#1, 1715-27 Avenue NE  
Calgary, AB T2E 7E1  
Canada

Tel: +1-403-291 0313  
Fax: +1-403-250 8786

[www.emscan.com](http://www.emscan.com)